




AZUR™

Side and Top Mount Filters

Thermoplastic Sand Filter especially designed for both above ground and inground pools!



This economical sand filter consists of a one-piece, non-corrosive Polypropylene tank that is specifically designed for both above ground and inground pools. Azur filters are known for their superior strength and durability, and are available with a “Top” or “Side” mounted valve. The Azur Top Mount features a clamp style, multi-port valve equipped with a sight glass, pressure gauge and air relief vent. The Azur Side Mount has the same features with a side mounted valve and a clamp style closure lid. The special lateral design gives superior flow characteristics and long filter cycles for efficient operation.

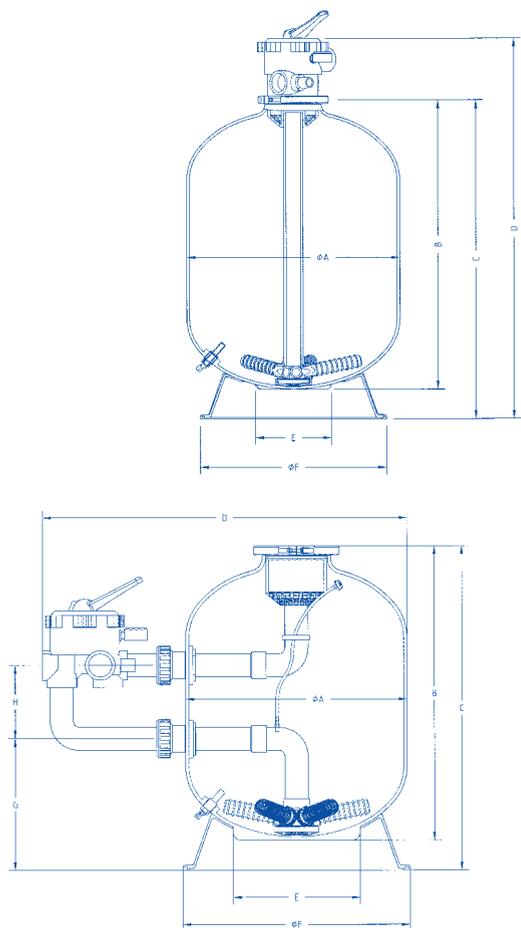

Standard features include:

- Side-mounted or top-mounted multi-port valve.
- Maximum operating pressure 2,5 bar.
- Maximum operating temperature 35°C.
- 2-year tank warranty.
- CE-approved.
- TÜV-approved.

Max. working pressure: 2,5 bar.

		F-15TF-AZ	F-19TF-AZ F-19SF-AZ	F-22TF-AZ F-22SF-AZ	F-26TF-AZ F-26SF-AZ	
Filter area	m ²	0,11	0,18	0,25	0,35	
Flow rate	m ³ /h	5,5	9	12	17	
FILTER CONTENT						
Gravel	Ø 3 → 5mm	kg	12	15	20	20
Sand	Ø 0,4 → 0,8mm	kg	30	65	120	225

	F-15TF-AZ	F-19TF-AZ F-19SF-AZ	F-22TF-AZ F-22SF-AZ	F-26TF-AZ F-26SF-AZ
A	375	475	560	660
B	462	639	777	925
C	no base	709	860	995
D	no base	784	864	968
E	273	273	273	232
F	no base	489	489	489
G		288	372	527
H		160	160	160

All dimensions in mm

DISTRIBUTION:



Pentair Water Belgium nv

Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals (Belgium)
TEL: +32 14 25 99 11 • FAX: +32 14 25 99 73

Pentair Water Germany

Wiesenstraße 6, 64347 Griesheim (Germany)
TEL: +49 6155 84170 • FAX: +49 6155 841799
e-mail: mail@pw-europe.com • website: www.pentairpooleurope.com